

FIG. 1

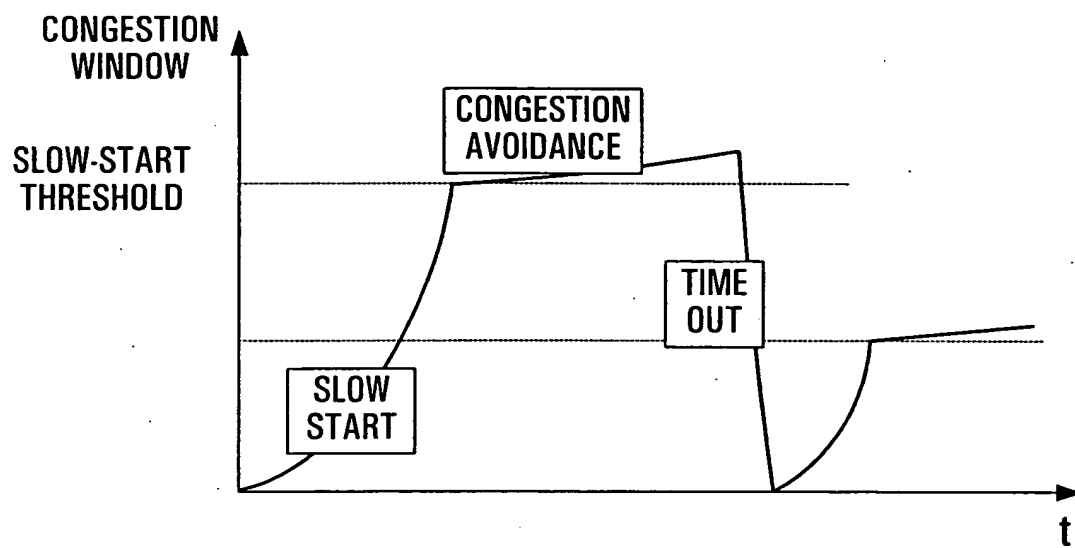


FIG. 2

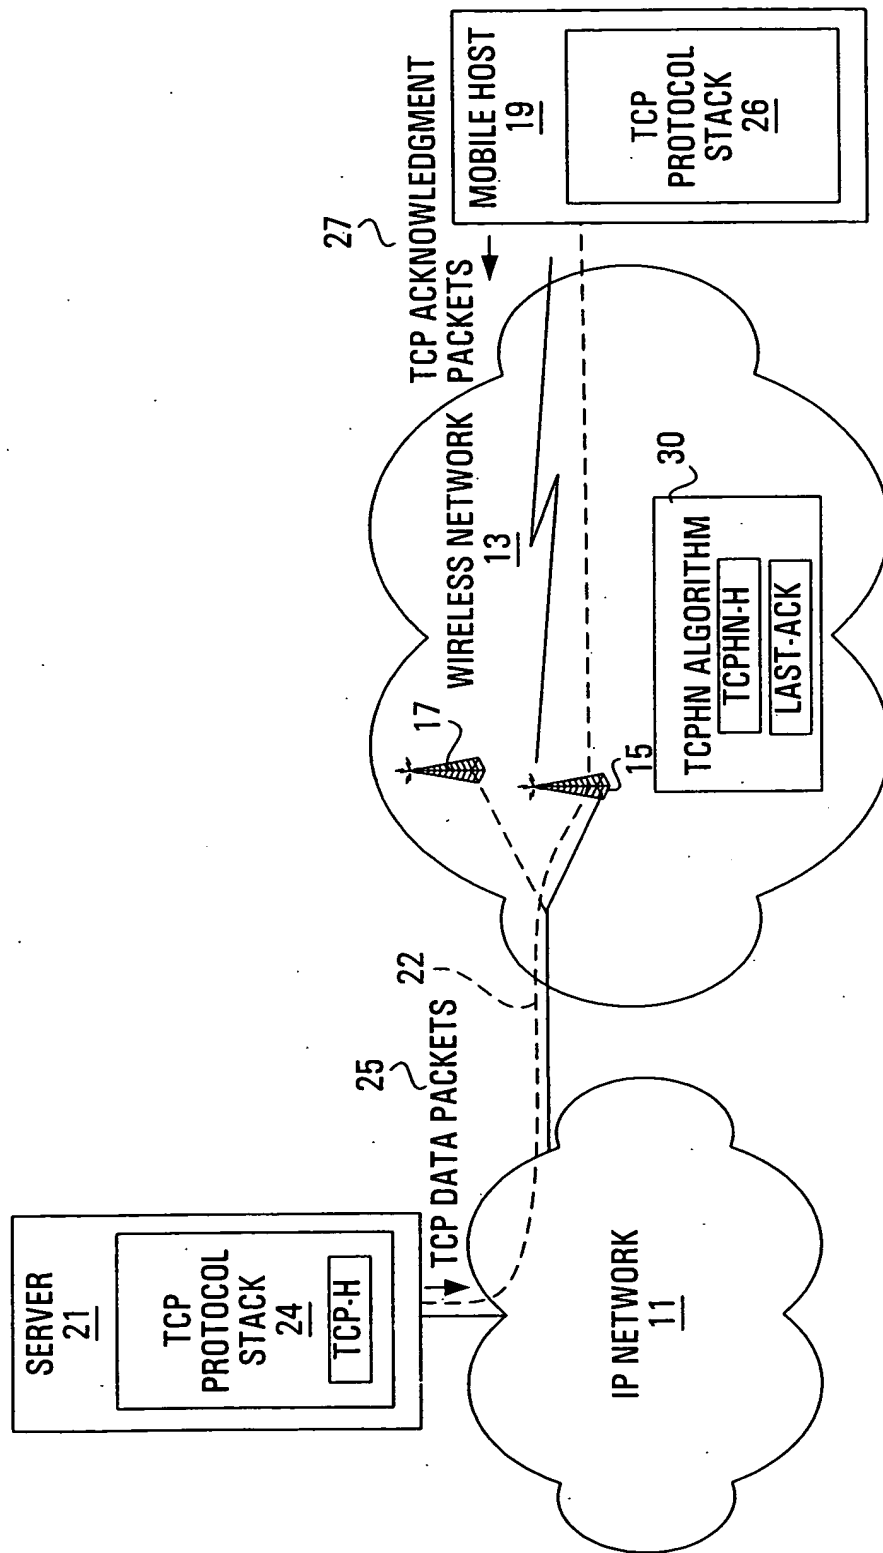


FIG. 3

40

16-BIT SOURCE PORT NUMBER 42		16-BIT DESTINATION PORT NUMBER 44	
32-BIT SEQUENCE NUMBER 46			
32-BIT ACKNOWLEDGEMENT NUMBER 48			
4-BIT HEADER LENGTH 50	RESERVED (6 BITS) 52	T	F
		C	S
		P	Y
		H	N
		G	N
		K	N
ADVERTIZED RECEIVER WINDOW SIZE 55		16-BIT URGENT POINTER 58	
16-BIT TCP CHECKSUM 56		54	

FIG. 4

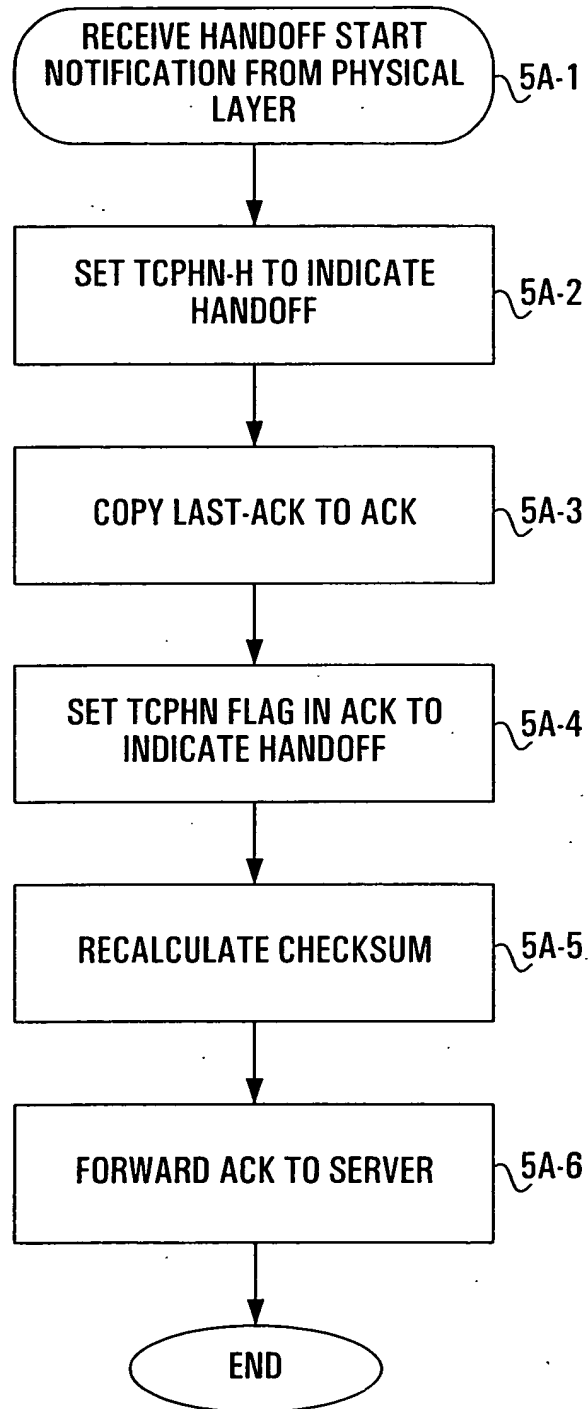


FIG. 5A

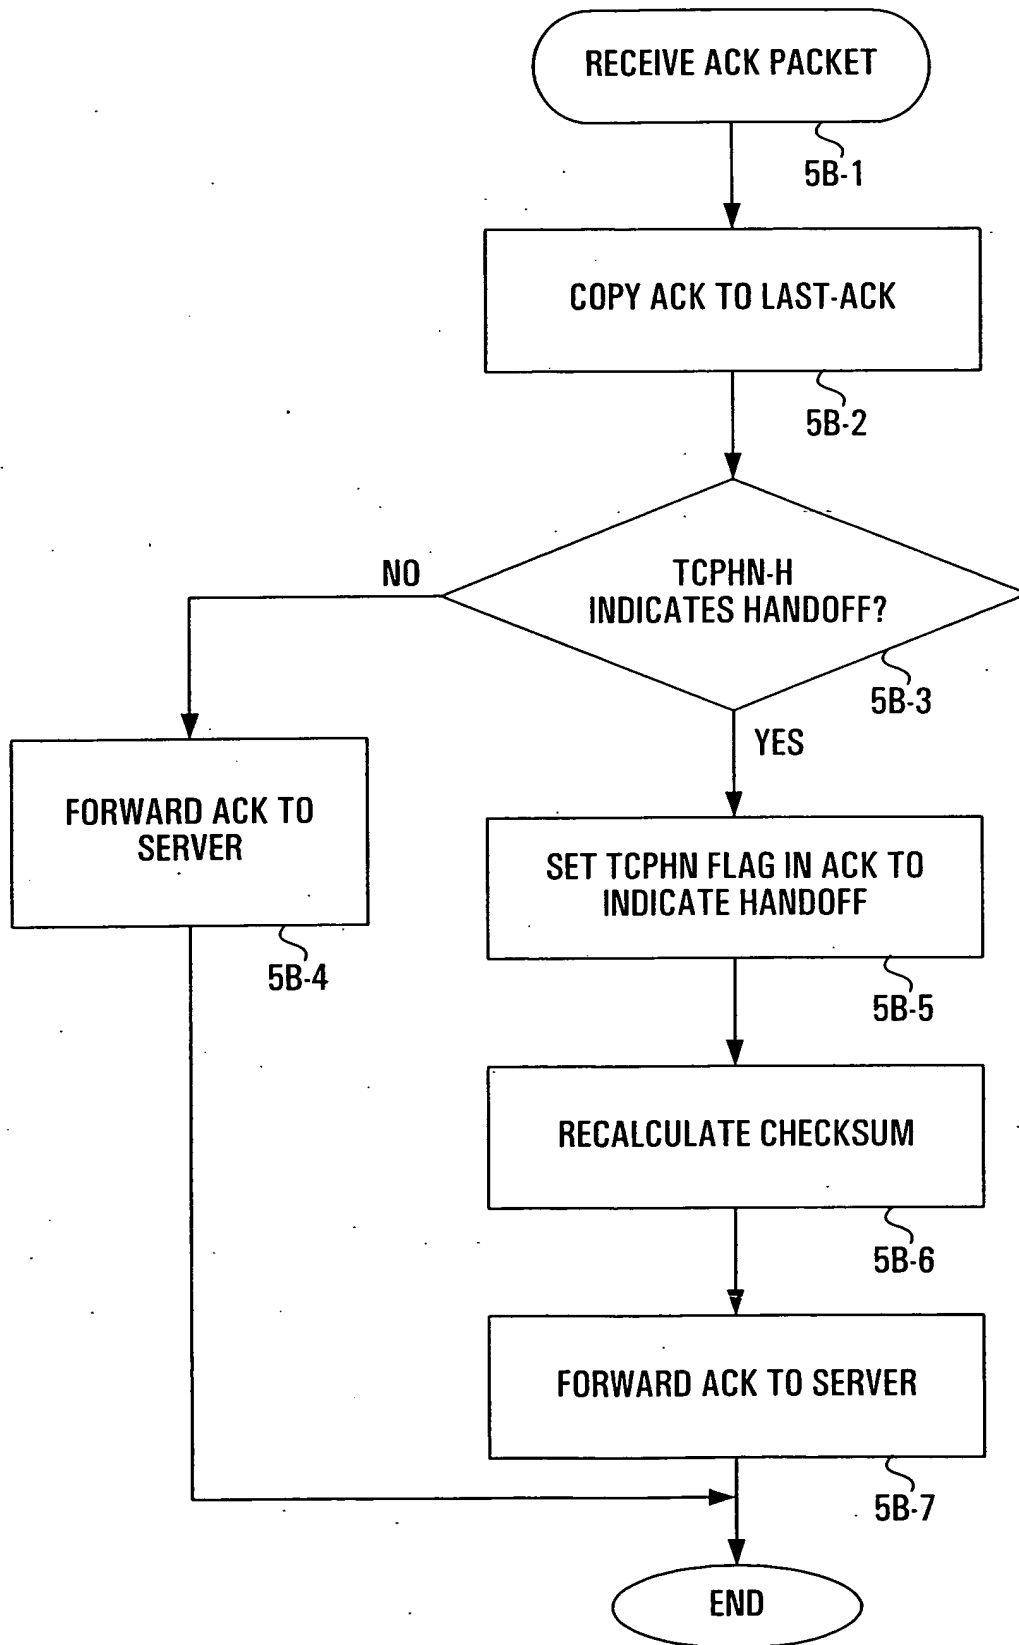


FIG. 5B

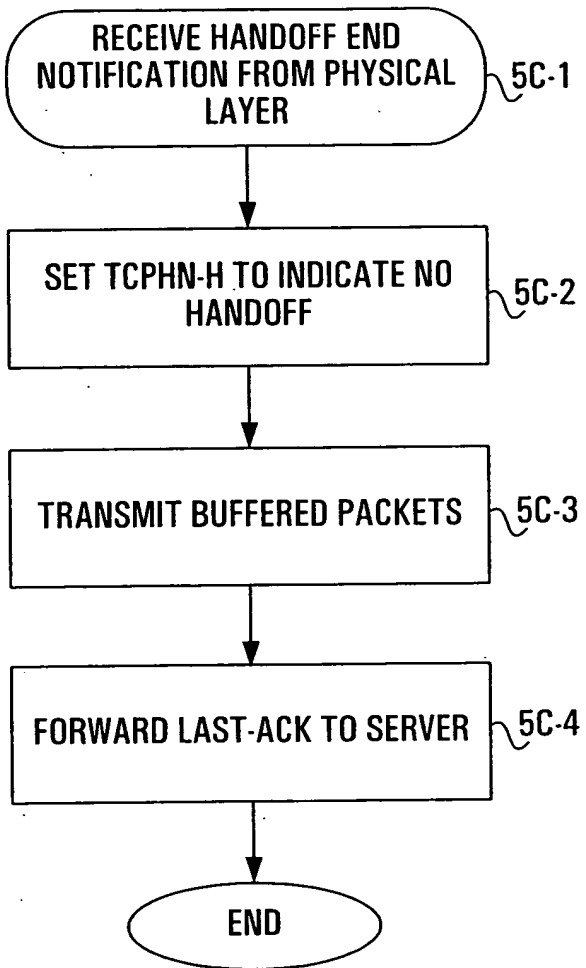


FIG. 5C

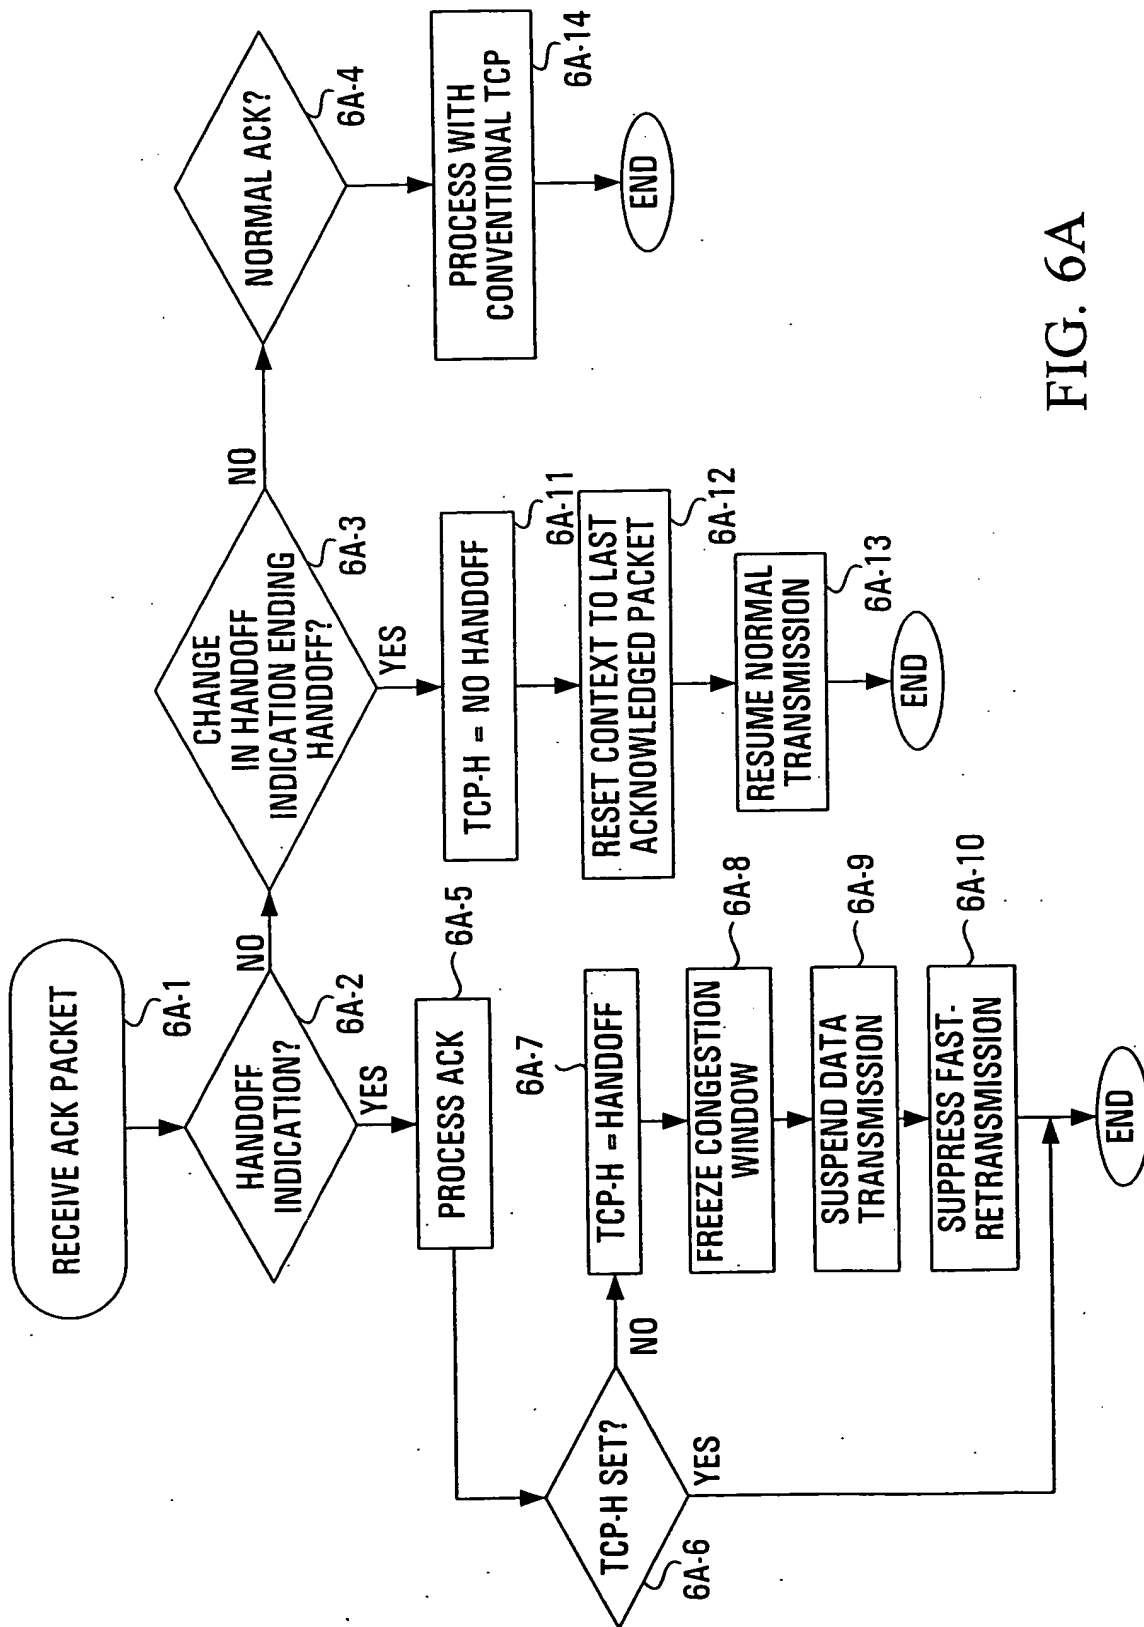


FIG. 6A

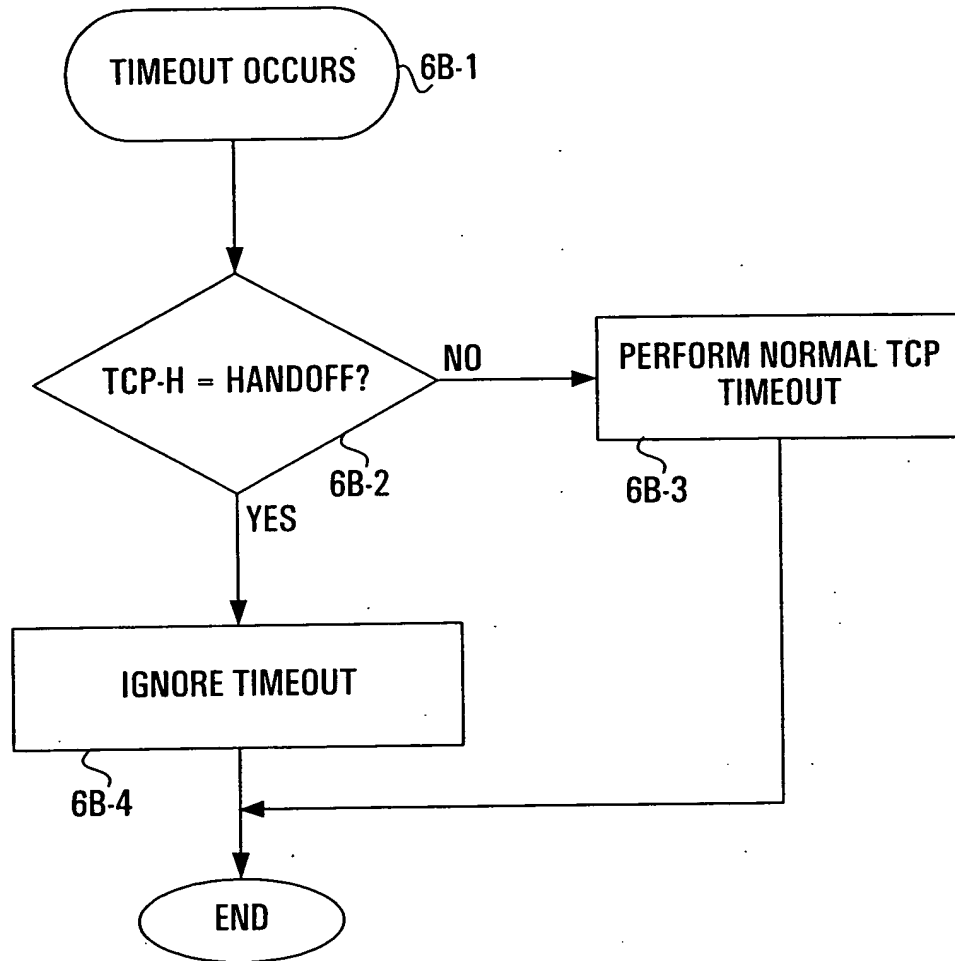


FIG. 6B